MANOMETER GAUGE VALVE
FIG. 60A/60I

GENERAL FEATURES:

- Needle valve
- Body in steel 1.0460 (60A) or stainless steel 1.4571 (60I & 60AI)
- 1x gland nut, 1 x male threaded
  Also available as 60AI with 1x gland nut + 1 x female threaded or 2 x gland nut on demand
- According to DIN 16270
- Temperatures: 120°C (60A) or 200°C (60I & 60AI)
- Max. working pressure: 400 bar





60A



60I

Item	Description	Material	
		60A	60I
1	Body	Steel 1.0460	Stainless steel 1.4571
2	Spindle	Stainless steel 1.4104	Stainless steel 1.4571
3	Needle	Stainless steel 1.4104	Stainless steel 1.4571
4	Ring	Steel 9S20K	Stainless steel 1.4571
5	Packing	Graphite	Teflon
6	Compression seal	Steel 9S20K	Stainless steel 1.4571
7	Screw fitting	Steel 9S20K	Stainless steel 1.4571
8	Handwheel	Plastic	
9	Screw fitting	Steel 9S20K	Stainless steel 1.4571
10	Purge	Stainless steel 1.4571	Stainless steel 1.4571

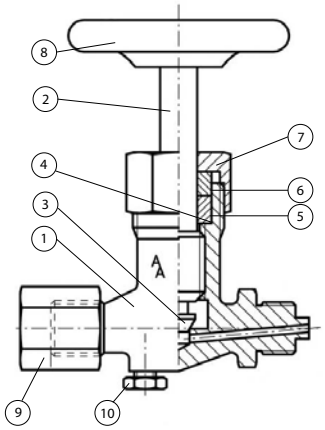

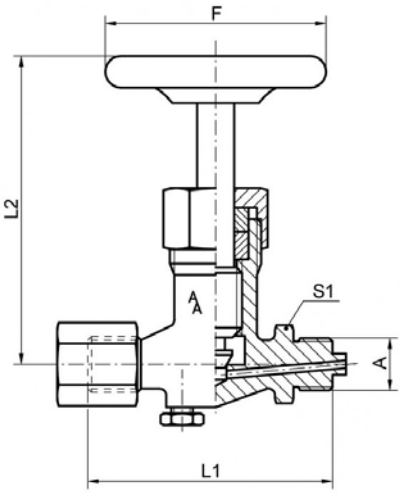

Type	Ø	A	F	L1	L2	S1
60A	1/2"	G 1/2"	63	100	94	27
60I	1/2"	G 1/2"	63	100	94	27

Subject to changes