CHECK VALVE
FIG. 6240X

ZETKAMA

GENERAL FEATURES:


- Flanged check valve DIN PN40
- Max. working pressure: 40 bar
- Temperature range: from -20°C to 400°C
- Leakage rate D according to EN 12266-1




CE

DESIGN STANDARDS	
Flanges	EN 1092-1
Face to face dimensions	EN 558-1
Marking	CE-PED, EN 19
TESTS AND CERTIFICATES	
Quality Assurance	CE-PED 2014/68/EU Module H
Pressure testing	EN-12266

Subject to changes

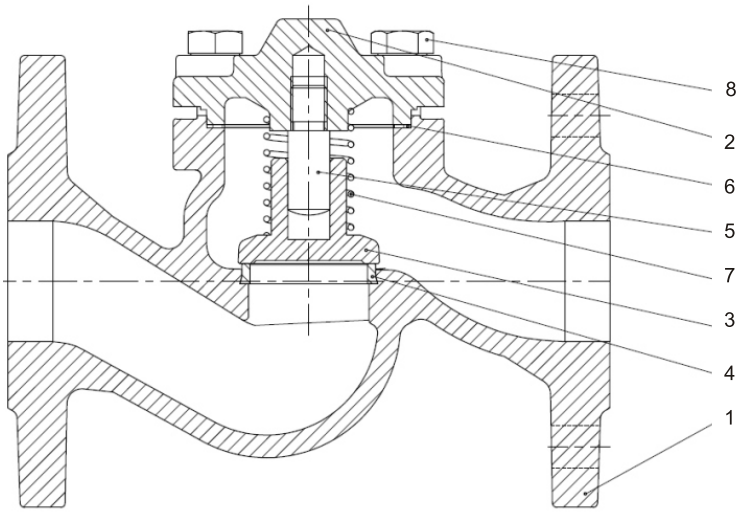

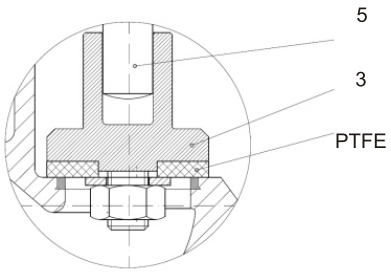


PTFE disc available on request

Item	Description	Materials
1	Body	GP240GH
2	Cover	GP240GH
3	Disc	X20Cr13
4	Seat ring	X12Cr13
5	Stem	X20Cr13
6	Gasket	Graphite CrNi
7	Spring	X17CrNi16-2
8	Bolt	8.8 A2A

Subject to changes

CHECK VALVE
6240X - Dimensions

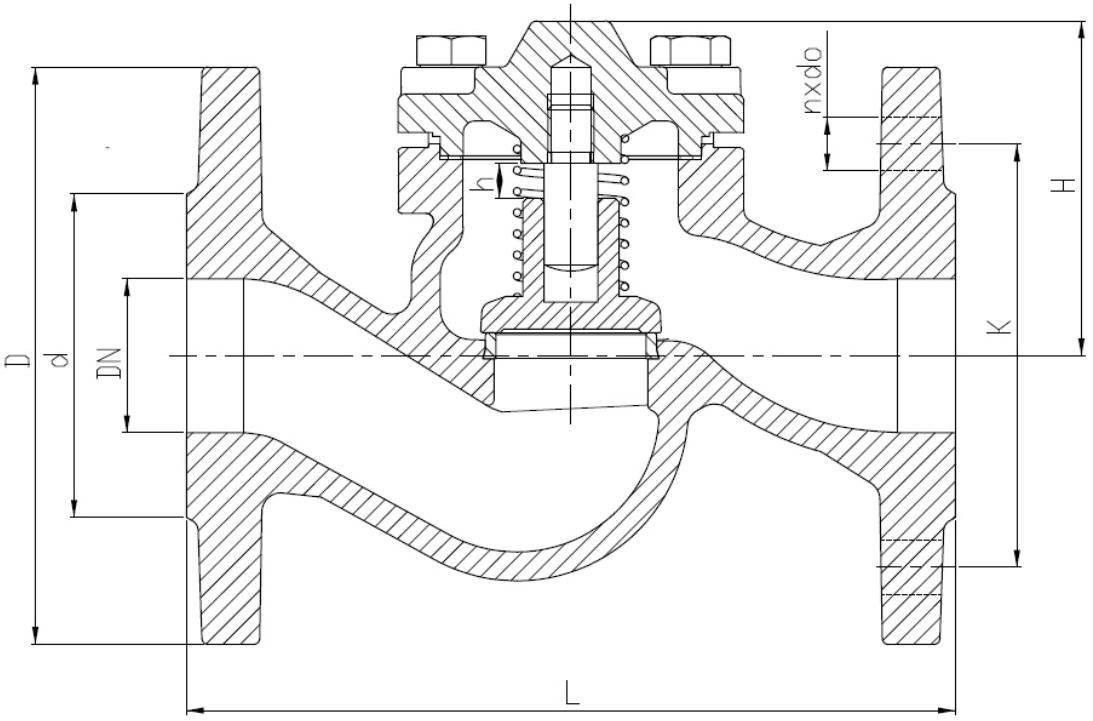


DIMENSIONS: (in mm)

DN	D	d	K	L	N-Ød	h	H	Kg
15	95	45	65	130	4x14	6	75	3,5
20	105	58	75	150	4x14	6	75	4,5
25	115	68	85	160	4x14	6	75	5,5
32	140	78	100	180	4x18	10	91	8,0
40	150	88	110	200	4x18	10	91	11,0
50	165	102	125	230	4x18	16,5	124	14,0
65	185	122	145	290	8x18	16,5	125	23,0
80	200	138	160	310	8x18	25	175	30,0
100	235	162	190	350	8x22	25	176	47,0
125	270	188	220	400	8x26	40	260	70,0
150	300	218	250	480	8x26	40	260	96,0
200	375	285	320	600	12x30	50	270	100,0

Subject to changes

PRESSURE-TEMPERATURE:

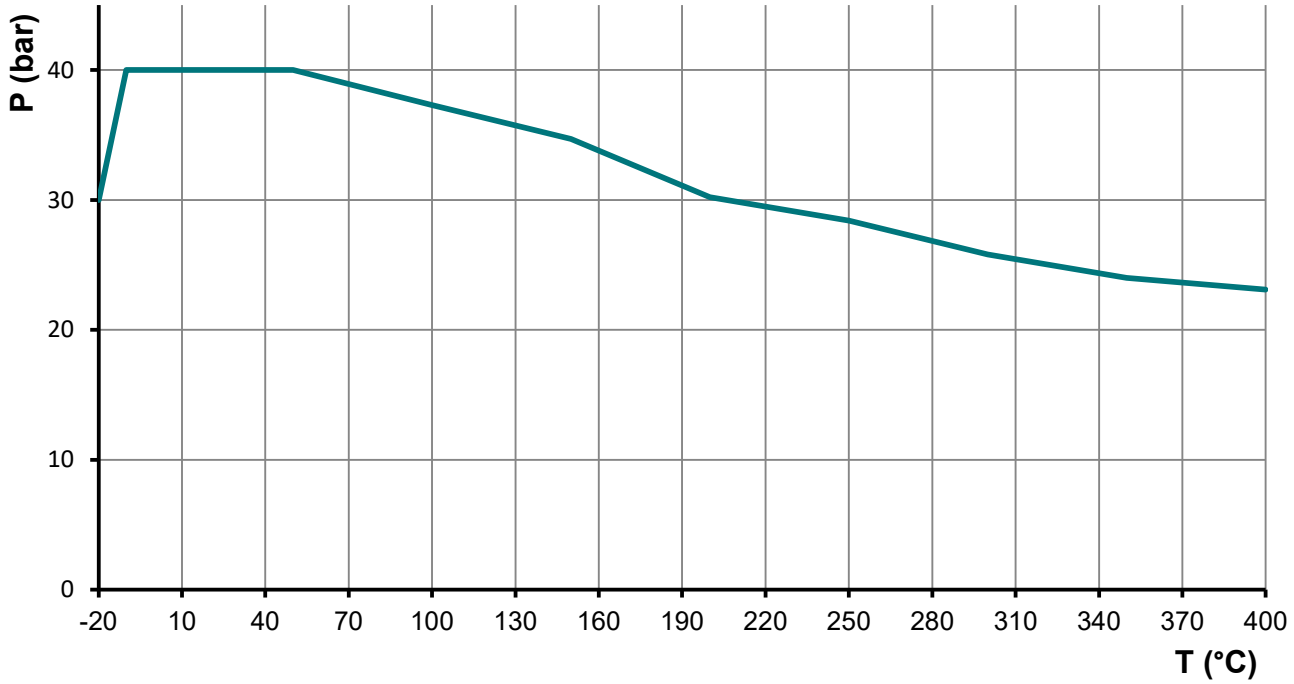

KV-VALUES:

DN	Kv (m³/h)
15	3,9
20	6,9
25	11,1
32	17,6
40	27,8
50	43,5
65	71,3
80	112,0
100	174,0
125	267,0
150	380,0
200	670,0

Subject to changes