INDUCTIVE SENSOR
FIG. CMOLIMN

PEPPERL+FUCHS

GENERAL FEATURES:

- Inductive contact Ø 12 mm, 3 wire
- Stainless steel housing
- Enclosure: IP67
- Temperature: -25°C ~ 70°C




CE

Compliance with standards and directives	
Standards	EN 60947-5-2:2004
	IEC 60947-5-2:2004


Subject to changes

INDUCTIVE SENSOR
FIG. CMOLIMN

DIMENSIONS: (mm)

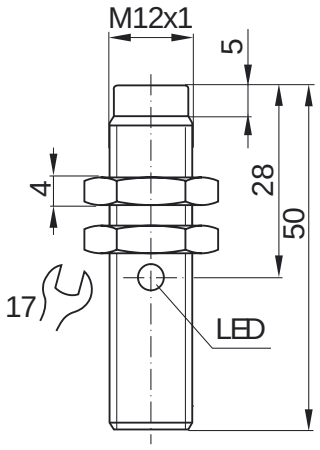

WIRING:

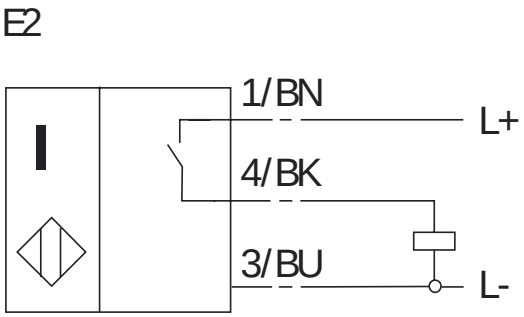

General specifications	
Switching element function	PNP
Rated operating distance	4 mm
Assured operating distance	0 … 3,24 mm
Indication of switching state	LED (yellow)
Nominal ratings	
Operating voltage	10 … 60 V
Operating current	0 … 200mA
Switching frequency	0 … 2000 Hz
Hystheresis	3%
Off state current	≤ 0,5 mA
No load supply current	≤ 15 mA
Ambient conditions	
Ambient temperature	-25 … +70 °C
Mechanical specifications	
Protection degree	IP67

Subject to changes