MANUAL FAIL-SAFE
FIG. PRO

GENERAL FEATURES:

- Reliable torque delivery for fast reseat
- Clockwise or counter-clockwise 90° spring travel
- Weatherproof sealed spring housing
- Casing in Die-cast zinc alloy with epoxy paint finish
- Lever in Stainless steel
- Temperature range: -20 ~ +80°C




ATEX


h II 2G c IIC T5 Gb
h II 2D c IIC 90°C Db

Type	Rotation	Output torque (Nm)	Kg
031F	Clockwise	14	1,9
051F	Clockwise	24	1,9
053F	Counter-clockwise	24	1,9
071F	Clockwise	45,5	5,2
073F	Counter-clockwise	45,5	5,2

Subject to changes

MANUAL FAIL-SAFE
Dimensions - FIG. PRO

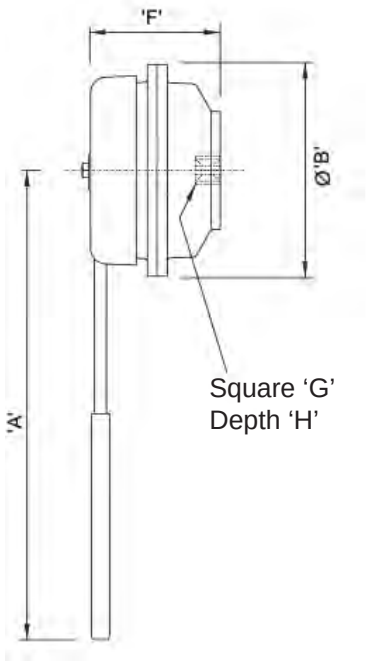

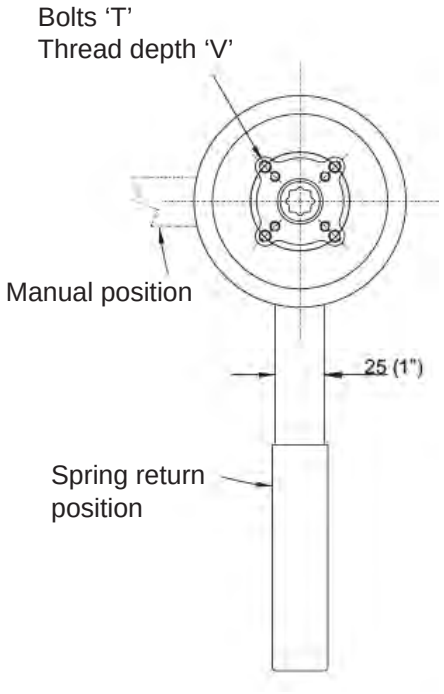

DIMENSIONS: (mm)

Type	A	ØB	F	G	H	T	V	ISO 5211
031F	238	108	66	11	12	M5/M6	10/12	F03 - F05
051F	238	118	62	14	16	M5/M6/M8	10/12/13	F03 - F05 - F7
053F	238	118	62	14	16	M5/M6/M8	10/12/13	F03 - F05 - F7
071F	360	152	103	17	22	M6/M8	14	F05 - F07
073F	360	152	103	17	22	M6/M8	14	F05 - F07

Subject to changes