POSITIONER
FIG. SIE6DR

GENERAL FEATURES:
- Position control for pneumatic part turn actuators
- Positioning signal: 4 ~ 20 mA
- Cable gland connection: 2x M20
- Protection class: IP 65
- Temperature: -30°C ~ +80°C
- Inlet pressure: 1,4 ~ 7 bar
- Manual operation possible
- Without mounting pieces

FIGURE:


Double acting actuators:
Type 6DR5020: without HART protocol, with Makrolon housing


Single acting actuators:
Type 6DR5010**:** without HART protocol, with Makrolon housing




CE

Subject to changes

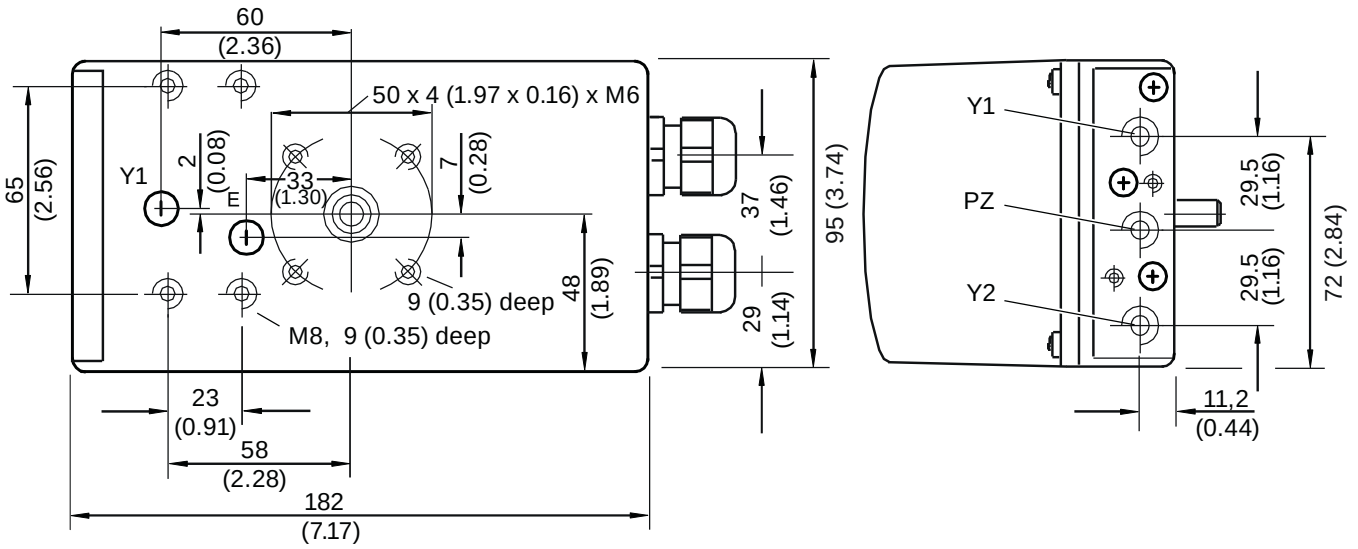

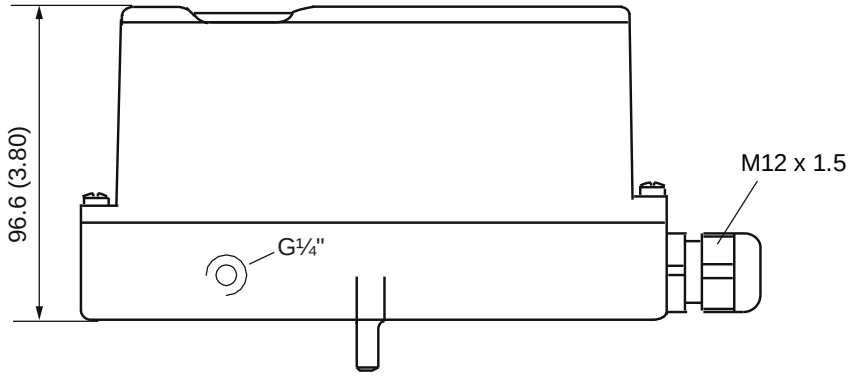

WIRING:

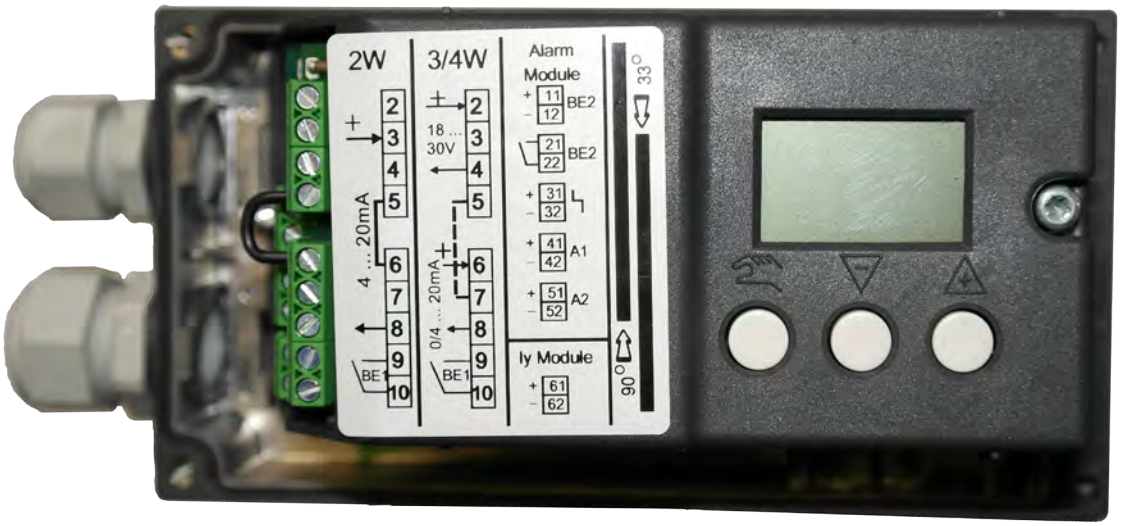

Subject to changes